


OFF-SET

2x1 Rounded on round recess




9P.2101


2x1 Rounded on round recess

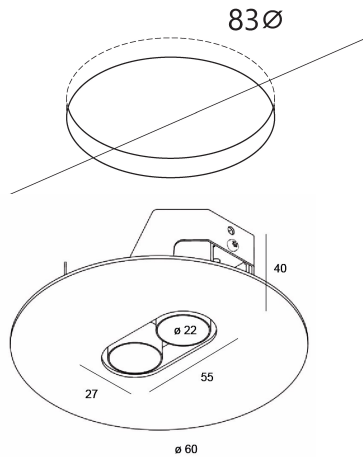

POLAR LDC

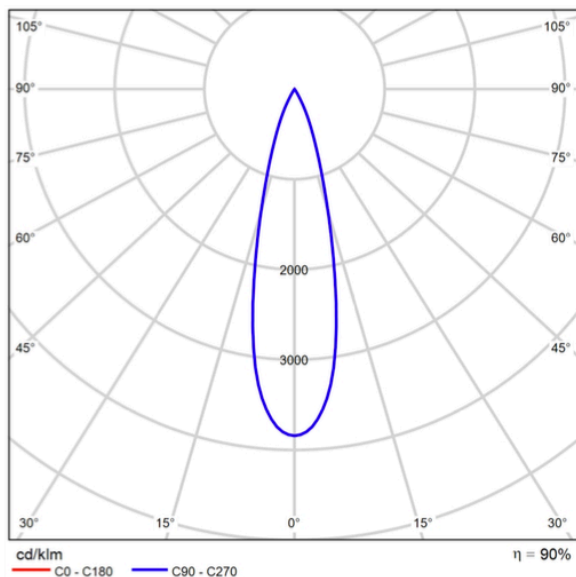

LINEAR LDC

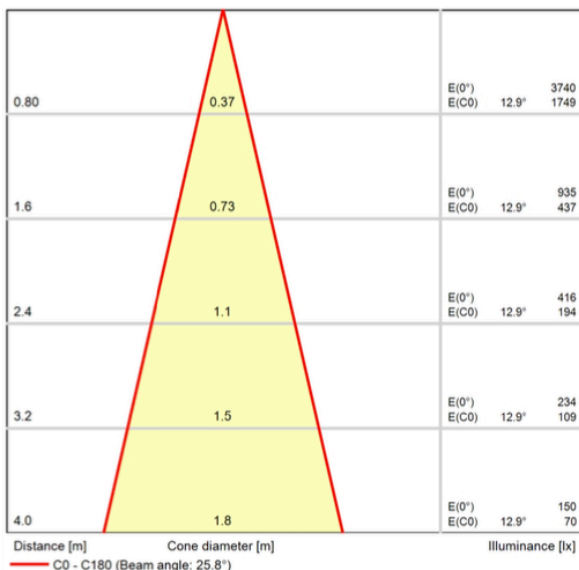

DESCRIPTION

OFF-SET 2x1 recessed downlight round in aluminium housing and structure, containing 2 narrow beam TIR-lenses 16° and led sources

FIXTURE

WH	white RAL9010 powder coated
BL	black anodised
GO	gold anodised
GM	gun metal anodised
SI	matte silver anodised
BR	bronze anodised

visor + base finish

BL	black anodised
GO	gold anodised
GM	gun metal anodised
BR	bronze anodised

IP rating IP40

cut out 110 mm (diameter)

ELECTRICAL FEATURES

power E dimmable (driver included)

Current C7 constant current 700 mA
 V2 constant voltage 24v

LIGHT SOURCE

LED quantity 2

Lamp power 9 W

Lamp flux 942 lm

Luminaire flux 848 lm

Efficiency %90

Luminous efficacy 94.1 lm/W

LED temperature	4	2400°K
	7	2700°K
	3	3000°K
	5	3500°K

CRI 93,6

PRODUCT CODES FOR ORDER INFORMATION

		model	beam angle	housing finish	visor/base finish	LED temperature	power	current
		210 OFF-SET 2x1 rounded in round recessed	1 15° beam	WH white RAL9010 powder coated BL black anodised GO gold anodised GM gun metal anodised SI matte silver anodised BR bronze anodised	BL black anodised GO gold anodised GM gun metal anodised BR bronze anodised	4 2400°K 7 2700°K 3 3000°K 5 3500°K	E dimmable (driver included)	C7 constant current 700 mA V2 constant voltage 24v
9	P

ADDITIONAL DOWNLOADS

Installation Instructions Photometric Files 