



OFF-SET

3x1 Square on long rounded

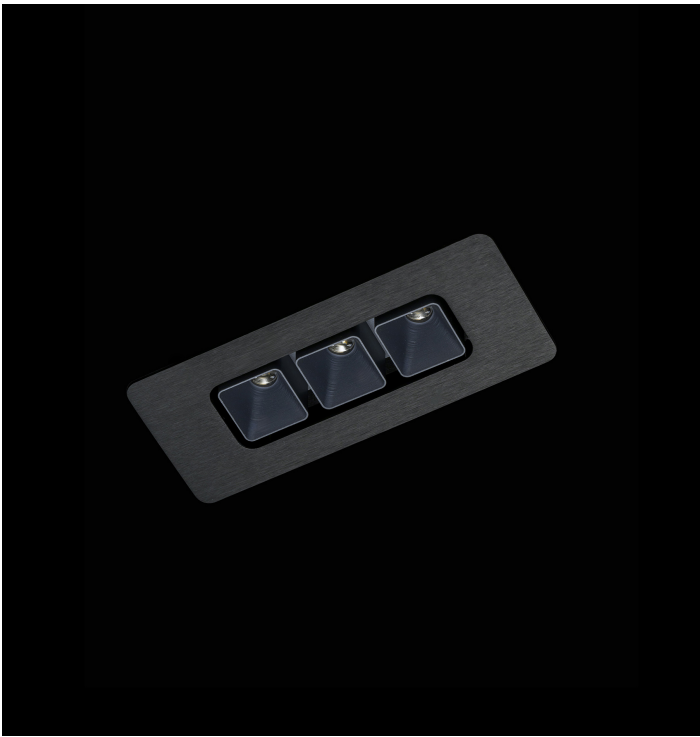

9P.3151

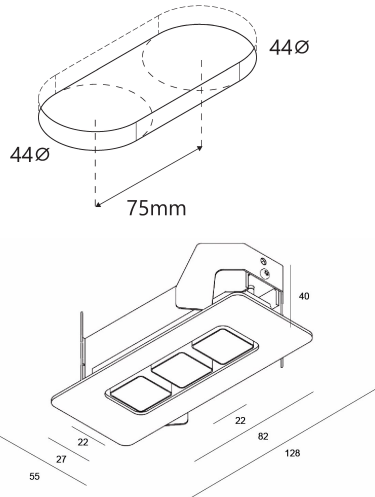

DESCRIPTION

OFF-SET 3x1 recessed downlight square in aluminium housing and structure, containing 3 narrow beam TIR-lenses 15° and led sources

FIXTURE

housing finish	WH	white RAL9010 powder coated
	BL	black anodised
	GO	gold anodised
	GM	gun metal anodised
	SI	matte silver anodised
	BR	bronze anodised

visor + base finish	BL	black anodised
	GO	gold anodised
	GM	gun metal anodised
	BR	bronze anodised

IP rating	IP40
-----------	------

cut out	110 mm (diameter)
---------	-------------------

ELECTRICAL FEATURES

power	E dimmable (driver included)
-------	------------------------------

Current	C7	constant current 700 mA
	V2	constant voltage 24v

LIGHT SOURCE

LED quantity	3
--------------	---

Lamp power	9 W
------------	-----

Lamp flux	934 lm
-----------	--------

Luminaire flux	841 lm
----------------	--------

Efficiency	%90
------------	-----

Luminous efficacy	93,3 lm/W
-------------------	-----------

LED temperature	4	2400°K
	7	2700°K
	3	3000°K
	5	3500°K


CRI	93
-----	----

UGR	≤ 10
-----	------


OPTICS

Beam angle	1 15°
------------	-------

POLAR LDC

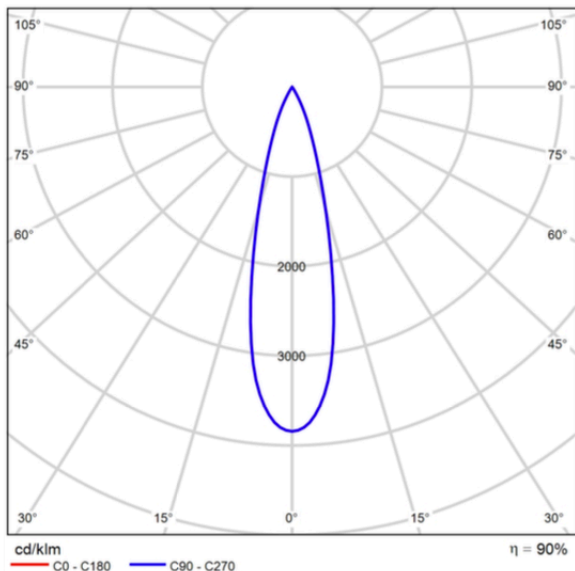

CONE DIAGRAM

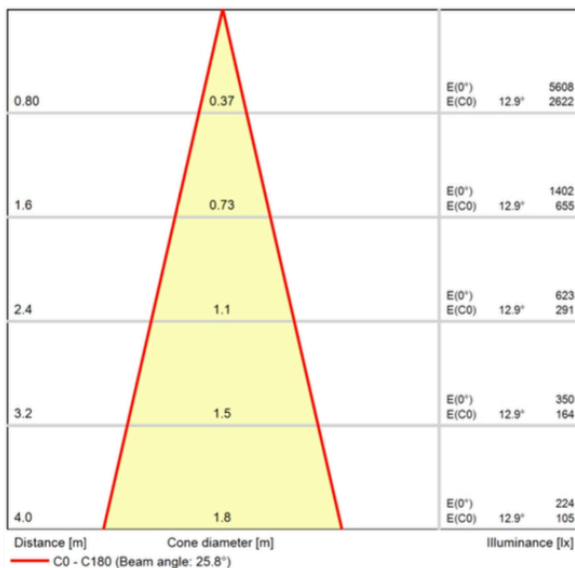

PRODUCT CODES FOR ORDER INFORMATION

		model	beam angle	housing finish	visor/base finish	LED temperature	power	current
		315 OFF-SET 3x1 squary in long round	1 15° beam	WH white RAL9010 powder coated BL black anodised GO gold anodised GM gun metal anodised SI matte silver anodised BR bronze anodised	BL black anodised GO gold anodised GM gun metal anodised BR bronze anodised	4 2400°K 7 2700°K 3 3000°K 5 3500°K	E dimmable (driver included)	C7 constant current 700 mA V2 constant voltage 24v
9	P

ADDITIONAL DOWNLOADS

Installation Instructions Photometric Files 