


OFF-SET

ESS on small round recess



9P.2001

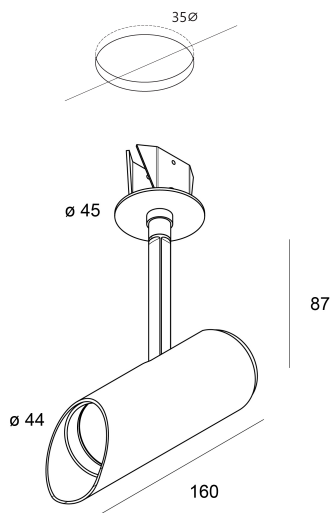

DESCRIPTION

OFF-SET ESS spot round in aluminium housing and structure, containing 15° lens

FIXTURE

housing finish	WH	white RAL9010 powder coated
	BL	black anodised
	GO	gold anodised
	GM	gun metal anodised
	SI	matte silver anodised
	BR	bronze anodised

visor + base finish

-

IP rating

IP40

cut out

35 mm (diameter)

ELECTRICAL FEATURES

power

E dimmable (driver included)

Current

C2 constant current 250 mA

LIGHT SOURCE

LED quantity

1

Lamp power

9,3 W

Lamp flux

706 lm

Luminaire flux

705 lm

Efficiency

%99,84

Luminous efficacy

75,8 lm/W

LED temperature

4 2400°K
7 2700°K
3 3000°K
5 3500°K

CRI

90

UGR


≤ 10

OPTICS


Beam angle

3 18°

POLAR LDC

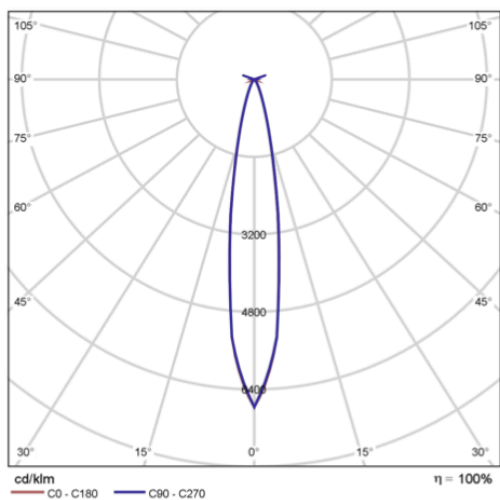

CONE DIAGRAM

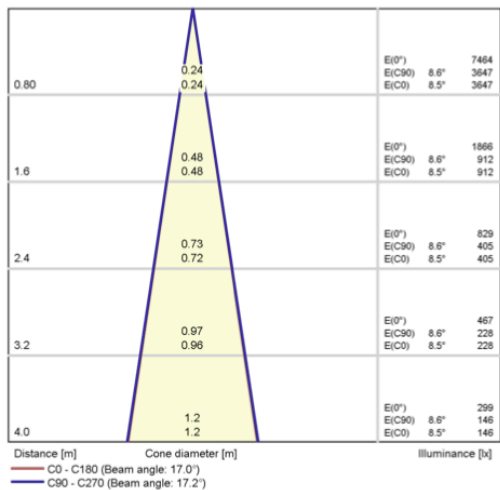



OFF-SET

ESS on small round recess

PRODUCT CODES FOR ORDER INFORMATION

		model	beam angle	housing finish	visor/base finish	LED temperature	power	current
		200 OFF-SET ESS on small round recess	1 15° beam	WH white RAL9010 powder coated BL black anodised GO gold anodised GM gun metal anodised SI matte silver anodised BR bronze anodised	-	4 2400°K 7 2700°K 3 3000°K 5 3500°K	E dimmable (driver included)	C2 constant current 250 mA
9	P

ADDITIONAL DOWNLOADS

- Installation Instructions
- Photometric Files
- 

*Black54 reserves the right of discontinuing or replacing products inside this database