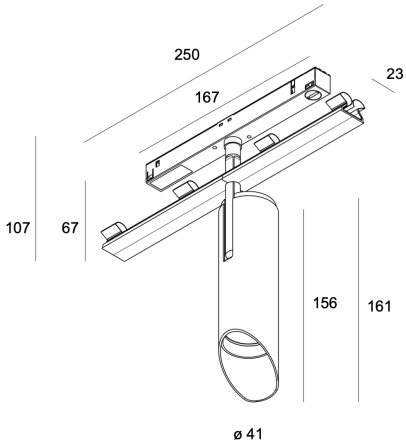


IN-SET
ESS with cover set



9T.2001



DESCRIPTION

IN-SET ESS spot with cover set, containing 15° beam angle lens.

FIXTURE

housing finish BL black anodised

visor + base finish WH white RAL9010 powder coated
BL black anodised
GO gold anodised
GM gun metal anodised
SI matte silver anodised
BR bronze anodised

IP rating IP40

ELECTRICAL FEATURES

power D DALI (driver included)

Current V4 constant voltage 48v

LIGHT SOURCE

LED quantity 1

Lamp power 9,3 W

Lamp flux 706 lm

Luminaire flux 705 lm

Efficiency %99,84

Luminous efficacy 75,8 lm/W

LED temperature 7 2700°K
3 3000°K

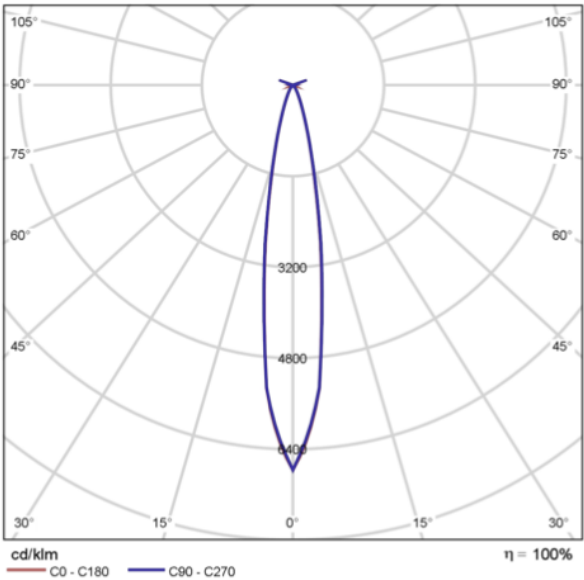
CRI 90

UGR ≤ 10

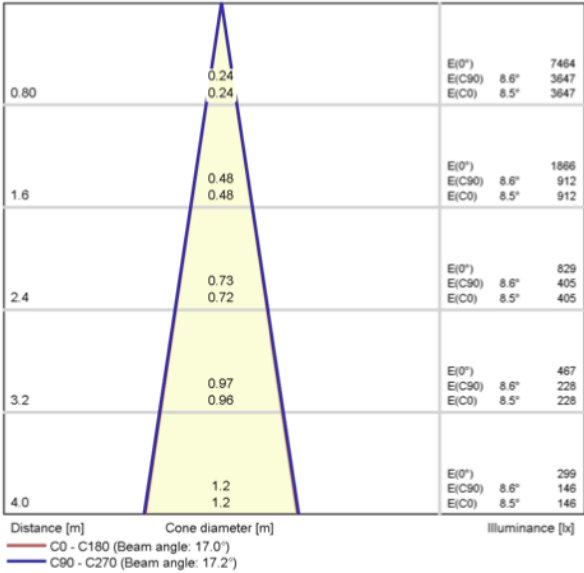
OPTICS

Beam angle 3 18°

POLAR LDC



CONE DIAGRAM




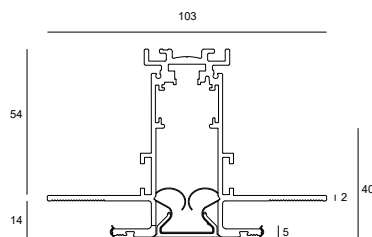

PRODUCT CODES FOR ORDER INFORMATION

		model	beam angle	housing finish	visor/base finish	LED temperature	power	current
		200 IN-SET ESS with cover set	1 15° beam	powder coated BL black	BL black anodised GO gold anodised GM gun metal anodised BR bronze anodised	7 2700°K 3 3000°K	D DALI (driver included)	V4 constant voltage 48v
9	T	.	.	.	.	.	.	.


ADDITIONAL DOWNLOADS

- Installation Instructions
- Photometric Files
- 



*Black54 reserves the right of discontinuing or replacing products inside this database

**7T.2020.BL0**

recessed track for dry ceilings 2 meter (48V + dali)

**7T.1020.BL0**

recessed track for gypsum ceilings 2 meter (48V + dali)

**7T.1010.BL0**

recessed track for gypsum ceilings 1 meter (48V + dali)

**7T.0100.BL0**

set of endocarps (2p)

**7T.0110.BL0**

electrical feeder

**7T.0120.BL0**

electrical coupler

**7T.0130.BL0**

mechanical coupler (2p)

**7T.0140.BL0**

hanging set for track (2p)

**7T.9900**

cutting tool for shortening conductors