



IN-SET

LINES WW wallwasher

9.T.5035
9.T.5065

DESCRIPTION

IN-SET LINES WW wall washer with asymmetrical beam available in 59cm and 29cm length options.


FIXTURE

housing finish	BL black anodised
visor + base finish	BL black anodised
IP rating	IP40


ELECTRICAL FEATURES

power	D DALI (DT6 driver included)
Current	V4 constant voltage 48v

POLAR LDC

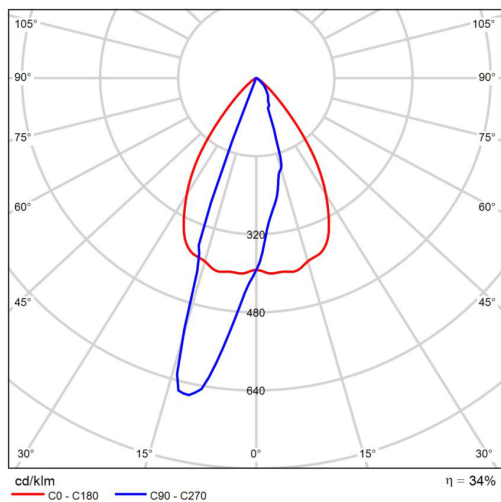

LINEAR LDC

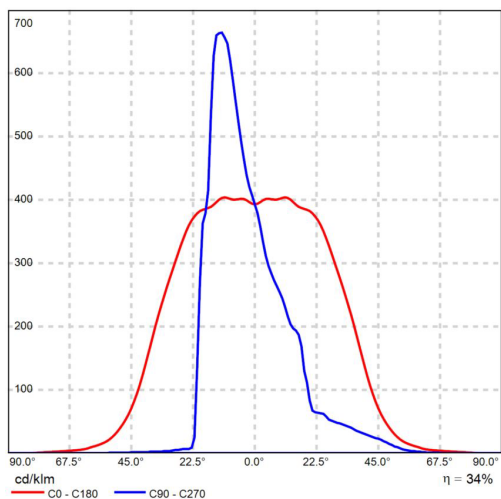


LIGHT SOURCE

LED Quantity	1
Lamp Power	15,4 W
Lamp Flux (700 mA)	1344 lm
Lamp Flux (1000 mA)	1920 lm
Luminaire Flux	460 lm
Efficiency	%34,26
Luminous Efficacy	30 lm/W
LED Temperature	7A 2700°K 3A 3000°K 8A 4000°K
CRI	97
R09	98
UGR	Not symmetric


OPTICS

Beam Angle	5 Asymmetric beam
------------	-------------------

LUMINANCE DIAGRAM

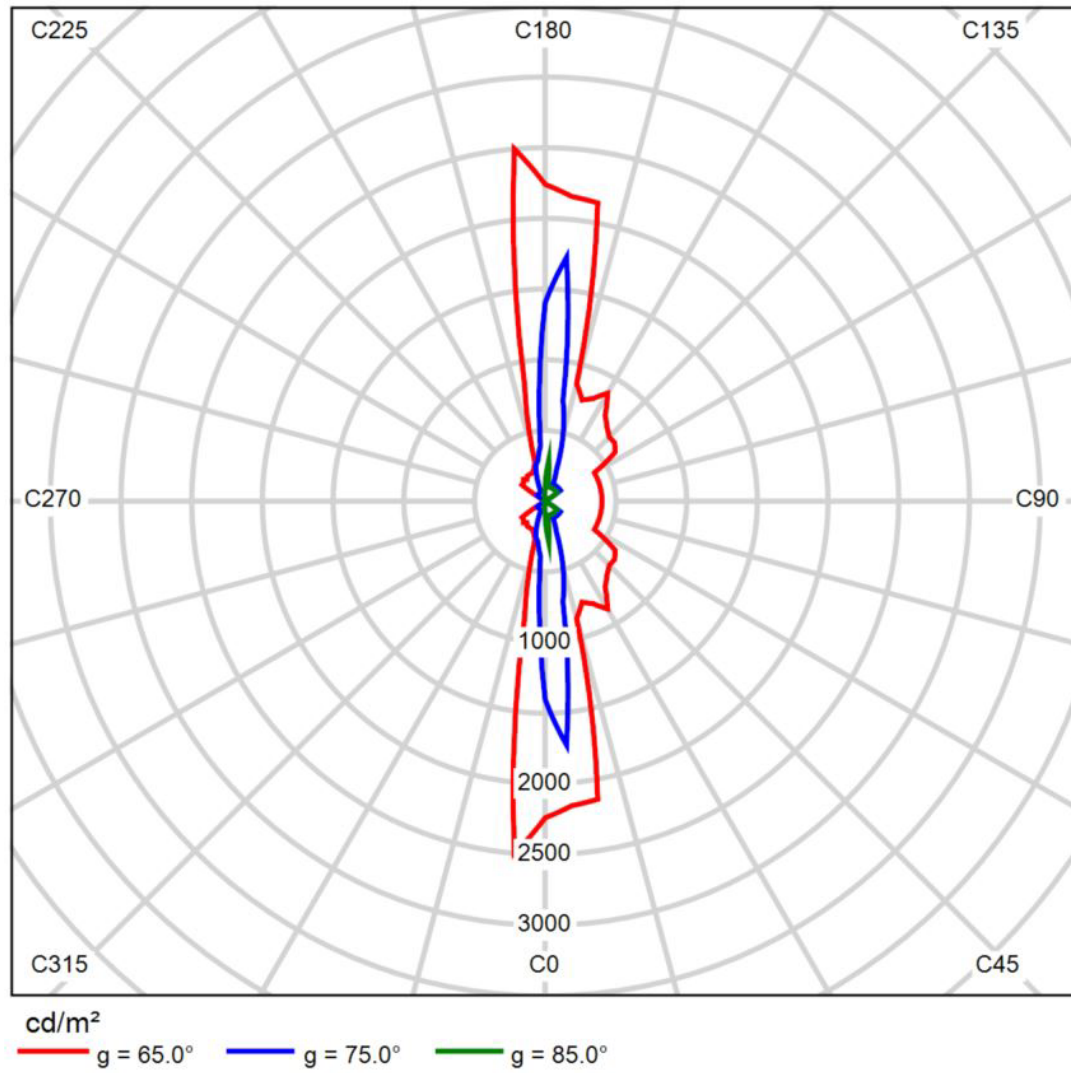


COLOR FIDELITY BY SAMPLE

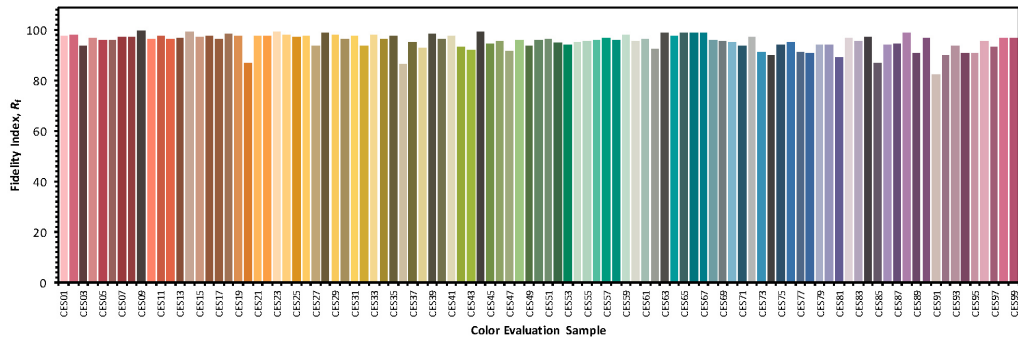


u'	0,2657
v'	0,5252
x	0,4607
y	0,4047
Δuv	-0,0022
R9	98

CQS

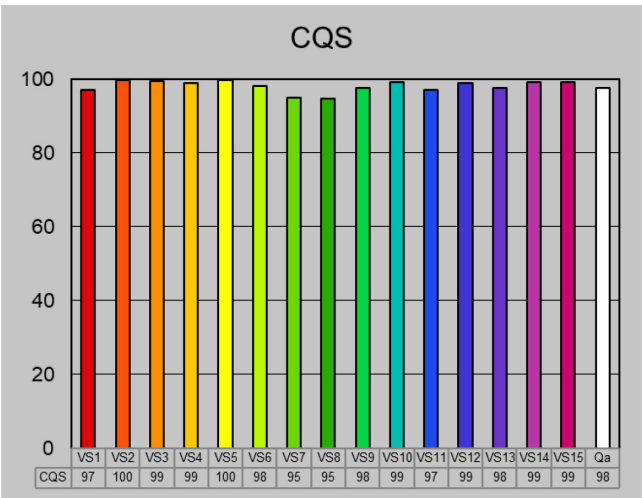


Fi	93
Rg@2700K	103
Rf@2700K	95
CQS	97,9

COLOR VECTOR GRAPHIC

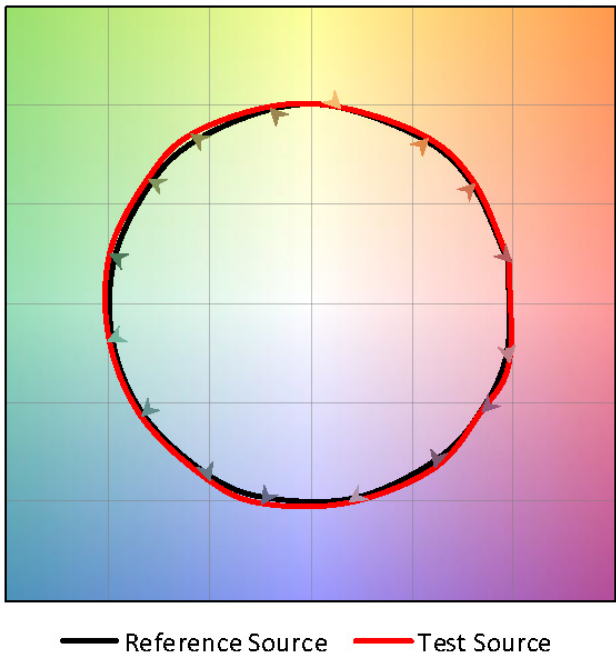




FIDELITY INDEX

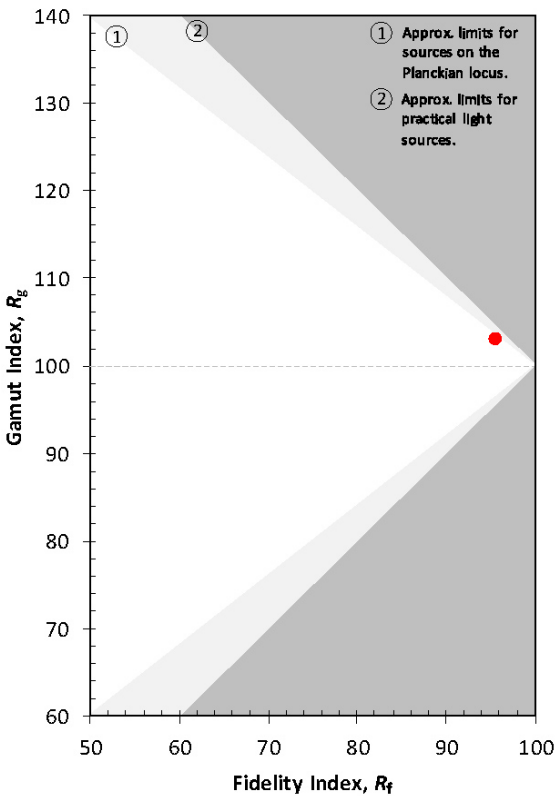


*Black54 reserves the right of discontinuing or replacing products inside this database

PRODUCT CODES FOR ORDER INFORMATION


				model	beam angle	housing finish	visor/base finish	LED temperature	power	current
				506 IN-SET LINES N Recessed Strip 59 cm 503 IN-SET LINES N Recessed Strip 29 cm	5 asymmetric beam	BL black anodised	-	7A 2700°K 3A 3000°K 8A 4000°K	D DALI (driver included)	V4 constant voltage 48v
9	.	T	.			.				

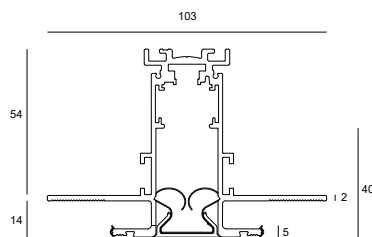**7.T.2020.BL0**

recessed track for dry ceilings 2 meter (48V + dali)

**7.T.1020.BL0**

recessed track for gypsum ceilings 2 meter (48V + dali)

**7.T.1010.BL0**

recessed track for gypsum ceilings 1 meter (48V + dali)

**7.T.0100.BL0**

set of endocarps (2p)

**7.T.0110.BL0**

electrical feeder

**7.T.0120.BL0**

electrical coupler

**7.T.0130.BL0**

mechanical coupler (2p)

**7.T.0140.BL0**

hanging set for track (2p)

**7.T.9900**

cutting tool for shortening conductors