

OFF-SET

OFF-SET NT asymmetric trimless




9.N.1015



9.N.1415




9.N.1035















9.N.1435




9.N.1025



9.N.1425

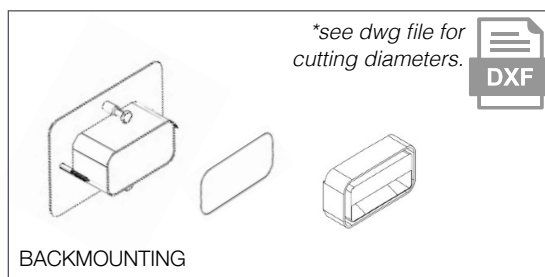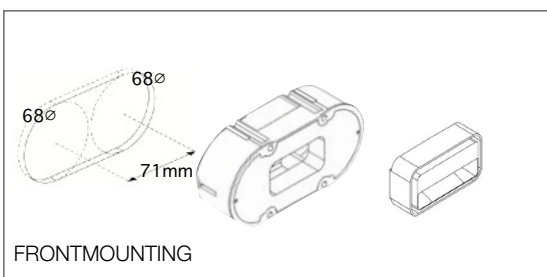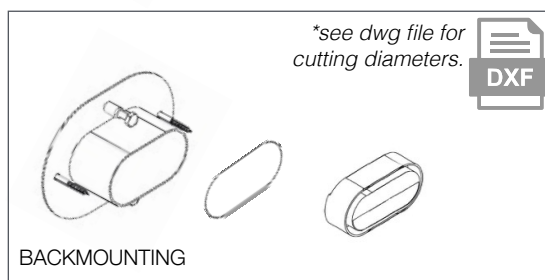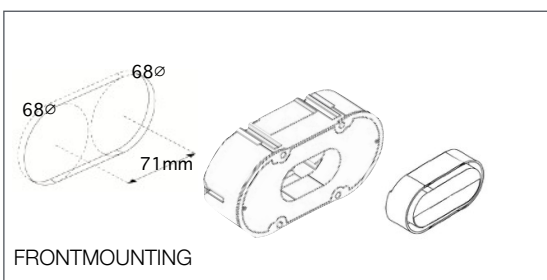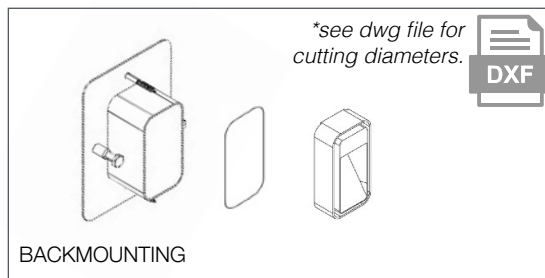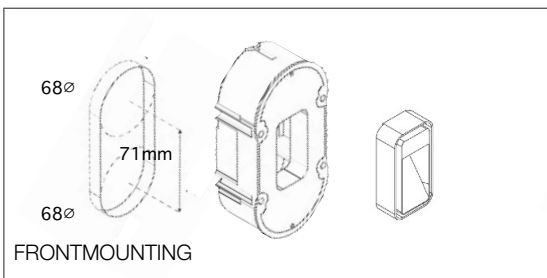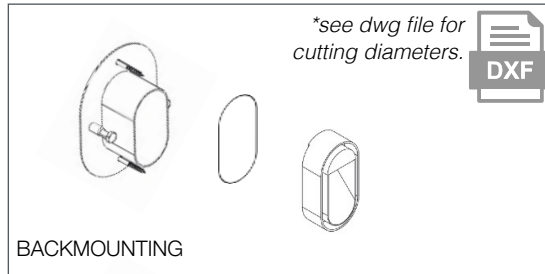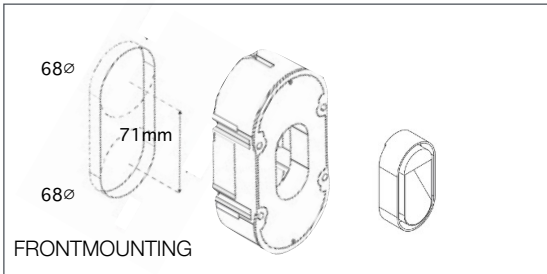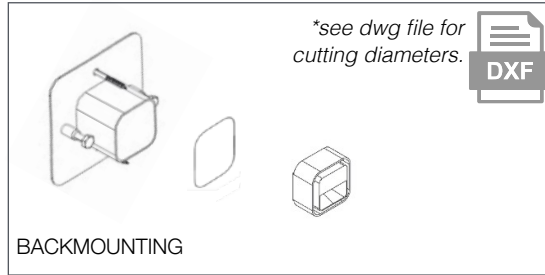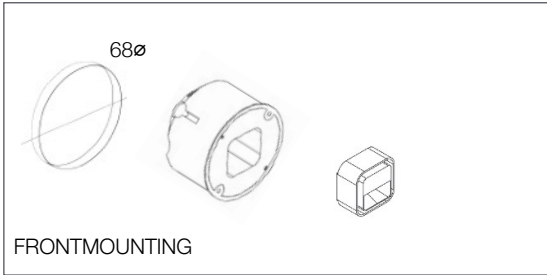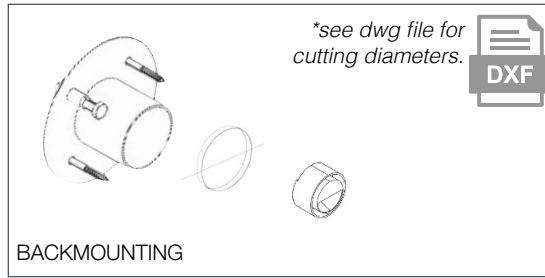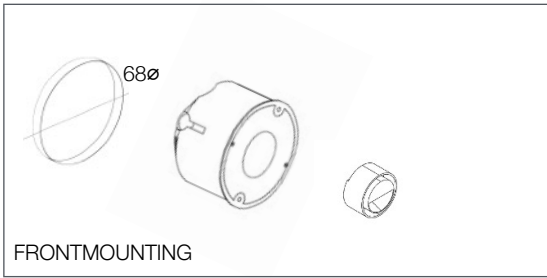

LUMINANCE DIAGRAM

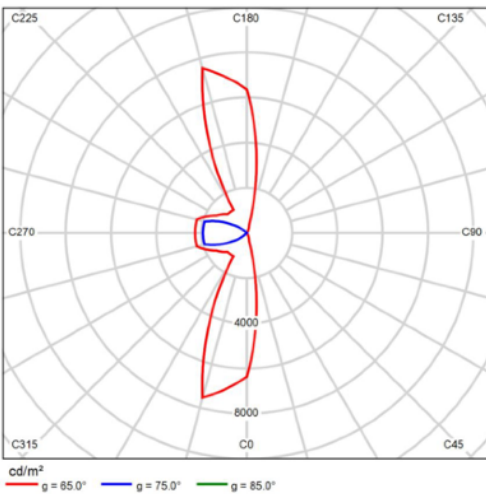

DESCRIPTION

OFF-SET NT trimless units with 1x1, 2x1, asymmetrical beam


FIXTURE

Housing Finish	WH	white RAL9010 powder coated
	BL	black anodised
	GO	gold anodised
	GM	gun metal anodised
	SI	matte silver anodised
	BR	bronze anodised

Visor/Base finish	BL	black anodised
	GO	gold anodised
	GM	gun metal anodised
	BR	bronze anodised

IP Rating	IP20
------------------	------

POLAR LDC

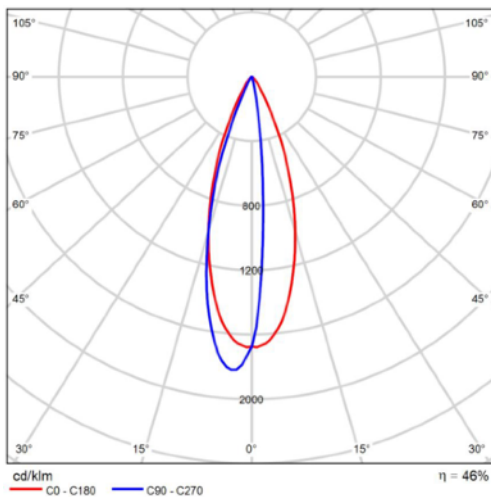

ELECTRICAL FEATURES

9.N.1015	9.N.1025
9.N.1415	9.N.1425
9.N.1035	
9.N.1435	

Power	E	dimmable (driver excluded)
--------------	---	----------------------------

Current	C7 constant current 700mA	C7 constant current 700mA
		V2 constant voltage 24v


LIGHT SOURCE (data at 2700°K)

LED Quantity	1	2
Lamp Power (700 mA)	2,3 W	4,2 W
Lamp Power (1000 mA)	3,4 W	6,3 W
Lamp Flux (700 mA)	225 lm	450 lm
Lamp Flux (1000 mA)	158 lm	316 lm
Luminaire Flux (700 mA)	97 lm	195 lm
Luminaire Flux (1000 mA)	73 lm	146 lm
Efficiency	%43,7	%46,3
Luminous Efficacy	71,3 lm/W	75,8 lm/W
LED Temperature	4	2400°K
	7	2700°K
	*(other Kelvin degrees upon request)	
CRI	91,8	
R09	53	
UGR	Not symmetric	


OPTICS

Beam Angle	5	asymmetric beam
-------------------	---	-----------------

LINEAR LDC

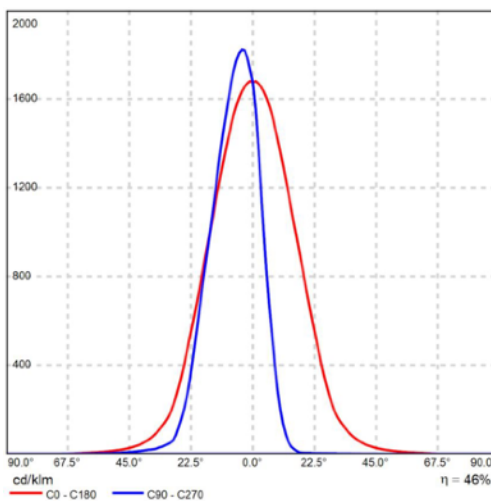


COLOR FIDELITY BY SAMPLE

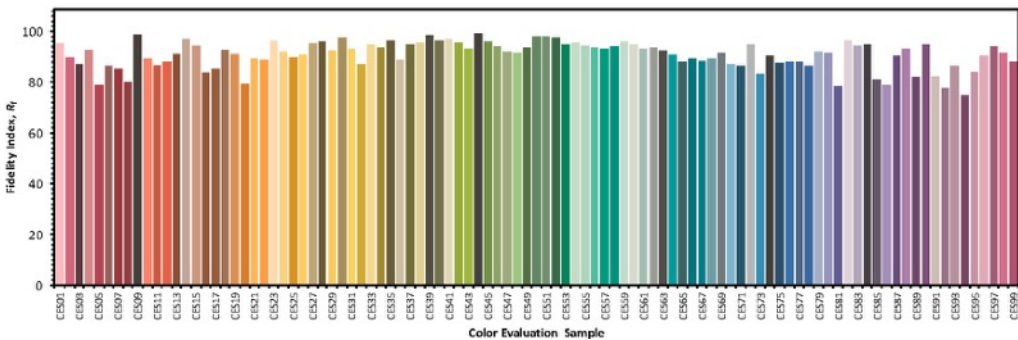


u'	0,2604
v'	0,5270
x	0,4569
y	0,4110
Δuv	0,0004
R9	53

CQS

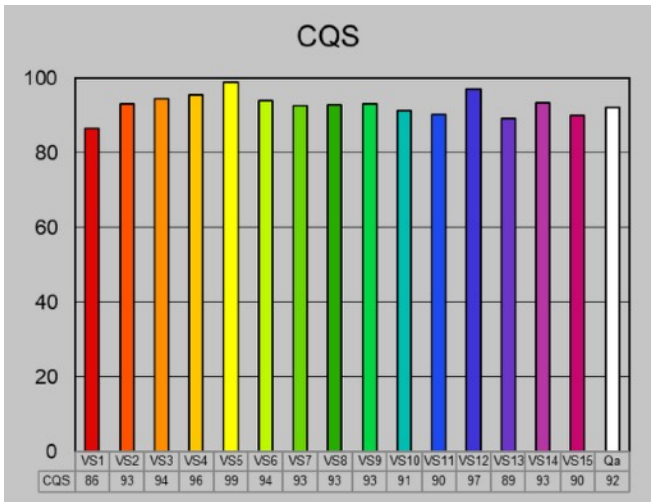


Rg@2700K	99
Rf@2700K	91

COLOR VECTOR GRAPHIC

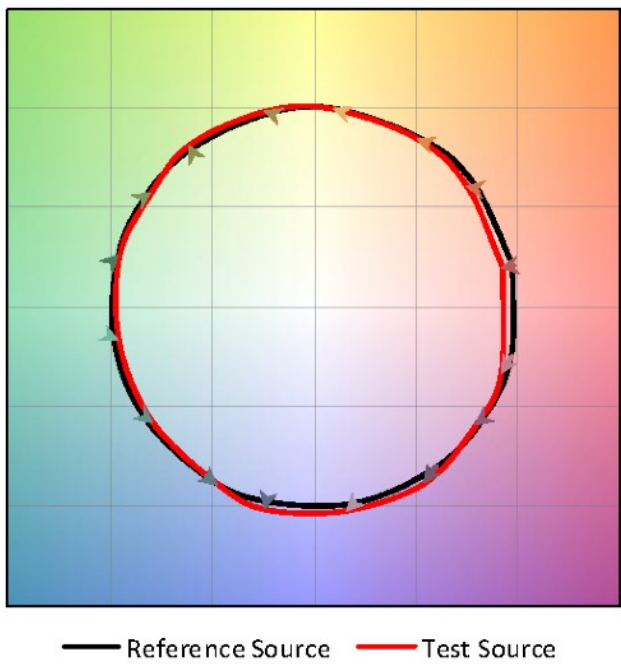

FIDELITY INDEX

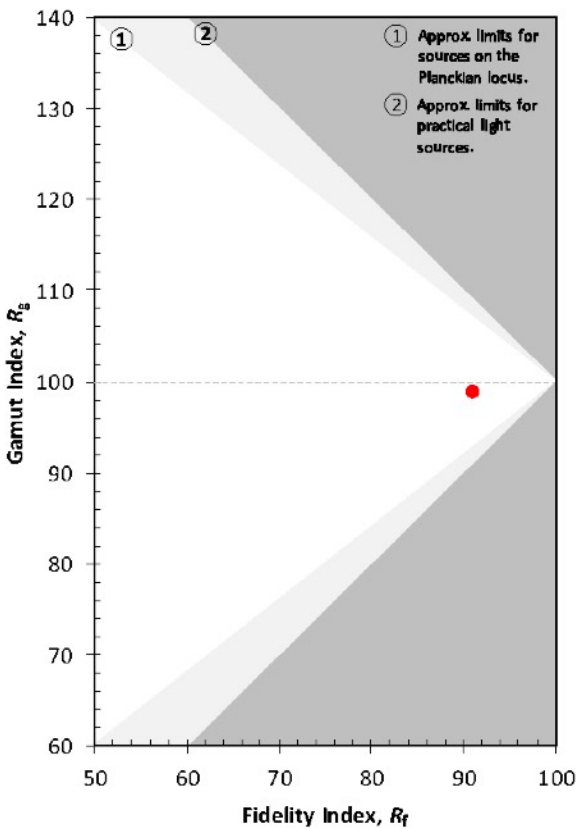

PRODUCT CODES FOR ORDER INFORMATION

OFF-SET NT asymmetric trimless

			model	beam angle	housing finish	visor/base finish	LED temperature	power	current
			101 rounded 1x1 asymmetric trimless 141 square 1x1 asymmetric trimless 103 vertical 1x1 asymmetric trimless 143 horizontal square 1x1 asymmetric trimless	5 asymmetric beam	-	BL black anodised GO gold anodised GM gun metal anodised BR bronze anodised	4 2400°K 7 2700°K <i>*(other Kelvin degrees upon request)</i>	E dimmable (driver excluded)	C7 constant current 700mA
9	.	N	.	.	.	.	.	.	.

			model	beam angle	housing finish	visor/base finish	LED temperature	power	current
			102 horizontal rounded 2x1 asymmetric trimless 142 horizontal square 2x1 asymmetric trimless	5 asymmetric beam	-	BL black anodised GO gold anodised GM gun metal anodised BR bronze anodised	4 2400°K 7 2700°K <i>*(other Kelvin degrees upon request)</i>	E dimmable (driver excluded)	C7 constant current 700mA V2 constant voltage 24v
9	.	N	.	.	.	.	.	.	.


*Black54 reserves the right of discontinuing or replacing products inside this database

OFF-SET NT ACCESSORIES

OFF-SET NT asymmetric trimless




7.P.101 1x1 front mounting tool rounded




7.P.102 2x1 front mounting tool rounded



7.P.141 1x1 front mounting tool square



7.P.142 2x1 front mounting tool square




7.P.201 1x1 back mounting tool rounded




7.P.202 2x1 back mounting tool rounded



7.P.203 3x1 back mounting tool rounded



7.P.241 1x1 back mounting tool square



7.P.242 2x1 back mounting tool square



7.P.243 3x1 back mounting tool square



7.P.7000 DCDC converter 700mA/24V dc