

OFF-SET
OFF-SET NT sign



9.S.4017

9.S.4027
9.S.4037
9.S.4417
9.S.4427
9.S.4437



9.S.4017



9.S.4417




9.S.4027



9.S.4427




9.S.4037



9.S.4437

CUTTING DIAMETERS AND MOUNTING

OFF-SET OFF-SET NT sign

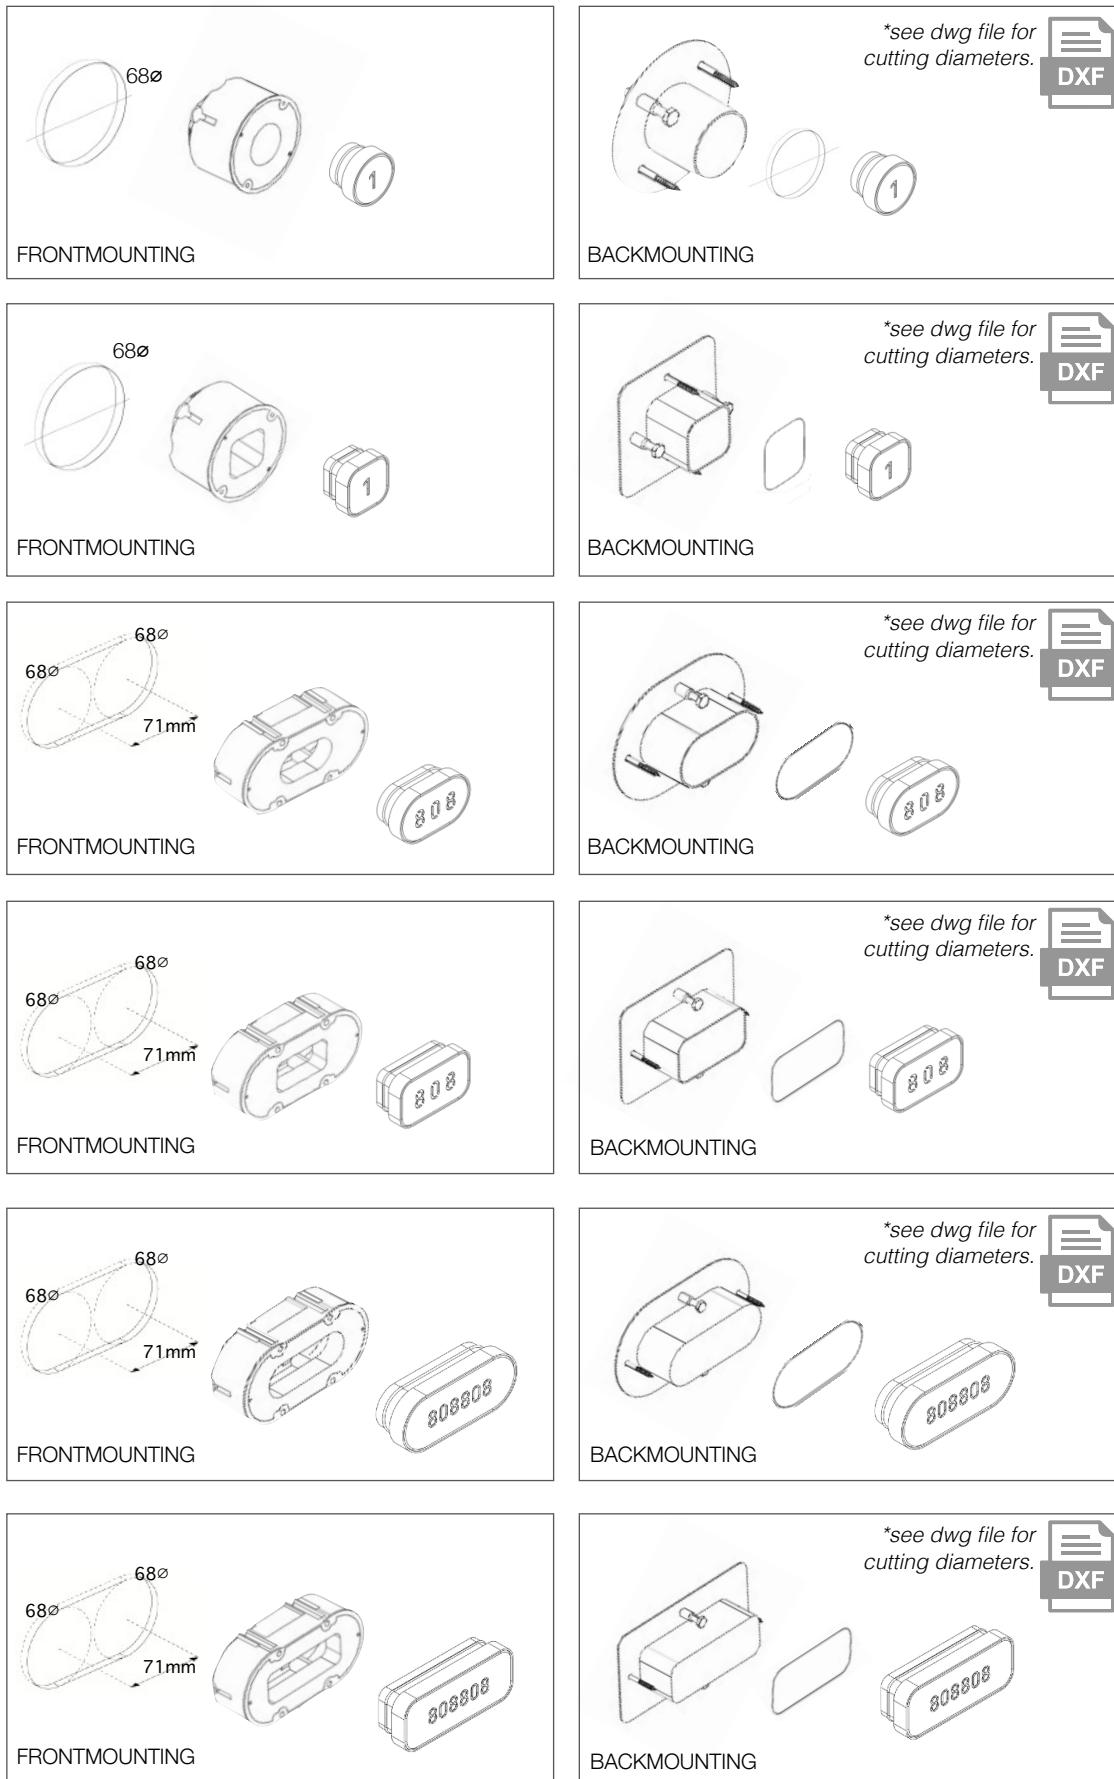


*Black54 reserves the right of discontinuing or replacing products inside this database


OFF-SET

OFF-SET NT sign


LUMINANCE DIAGRAM

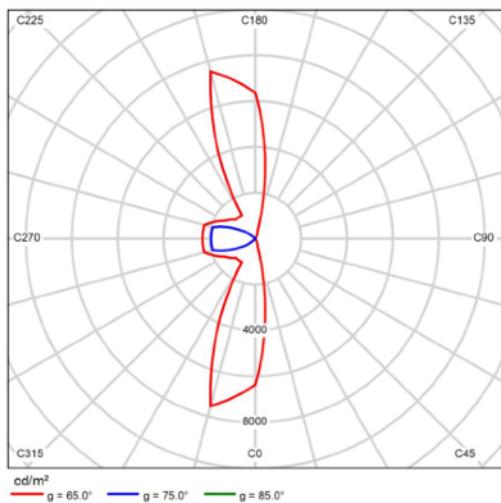

POLAR LDC

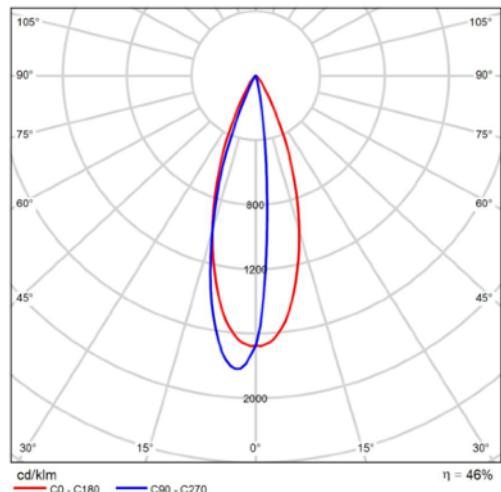

LINEAR LDC

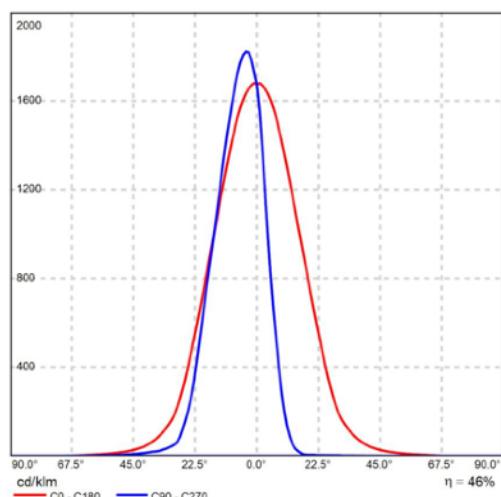

DESCRIPTION

OFF-SET NT sign with engraving options

Fixture

Visor + Base Finish

WH white RAL9010 powder coated
 BL black anodised
 GO gold anodised
 GM gun metal anodised
 SI matte silver anodised
 BR bronze anodised

IP Rating

IP44

ELECTRICAL FEATURES

| | | |
|----------|----------|----------|
| 9.S.4017 | 9.S.4027 | 9.S.4037 |
| 9.S.4417 | 9.S.4427 | 9.S.4437 |

Power E dimmable (driver excluded)

| | | | |
|----------------|----|---------|---------|
| Current | C7 | C7 / V2 | C7 / V2 |
|----------------|----|---------|---------|

LIGHT SOURCE (data at 2700°K)

| | | | |
|---------------------|---|---|---|
| LED Quantity | 1 | 2 | 3 |
|---------------------|---|---|---|

| | | | |
|----------------------------|-------|-------|-------|
| Lamp Power (700 mA) | 2,3 W | 4,6 W | 6,9 W |
|----------------------------|-------|-------|-------|

| | | | |
|-----------------------------|-------|-------|------|
| Lamp Power (1000 mA) | 3,7 W | 7,4 W | 11 W |
|-----------------------------|-------|-------|------|

| | | | |
|---------------------------|--------|--------|--------|
| Lamp Flux (700 mA) | 158 lm | 316 lm | 474 lm |
|---------------------------|--------|--------|--------|

| | | | |
|----------------------------|--------|--------|--------|
| Lamp Flux (1000 mA) | 225 lm | 450 lm | 675 lm |
|----------------------------|--------|--------|--------|

| | | | |
|--------------------------------|-------|-------|-------|
| Luminaire Flux (700 mA) | 17 lm | 34 lm | 51 lm |
|--------------------------------|-------|-------|-------|

| | | | |
|---------------------------------|-------|-------|-------|
| Luminaire Flux (1000 mA) | 22 lm | 44 lm | 66 lm |
|---------------------------------|-------|-------|-------|

| | |
|-------------------|--------|
| Efficiency | %11,06 |
|-------------------|--------|

| | |
|--------------------------|----------|
| Luminous Efficacy | 7,5 lm/W |
|--------------------------|----------|

| | |
|------------------------|----------|
| LED Temperature | 4 2400°K |
|------------------------|----------|

| |
|----------|
| 7 2700°K |
|----------|

**(other Kelvin degrees upon request)*

| | |
|------------|------|
| CRI | 89,5 |
|------------|------|

| | |
|------------|----|
| R09 | 46 |
|------------|----|


| | |
|------------|------|
| UGR | < 24 |
|------------|------|

OPTICS

| | |
|-------------------|-----------------|
| Beam Angle | 7 diffuse light |
|-------------------|-----------------|


OFF-SET OFF-SET NT sign

COLOR FIDELITY BY SAMPLE

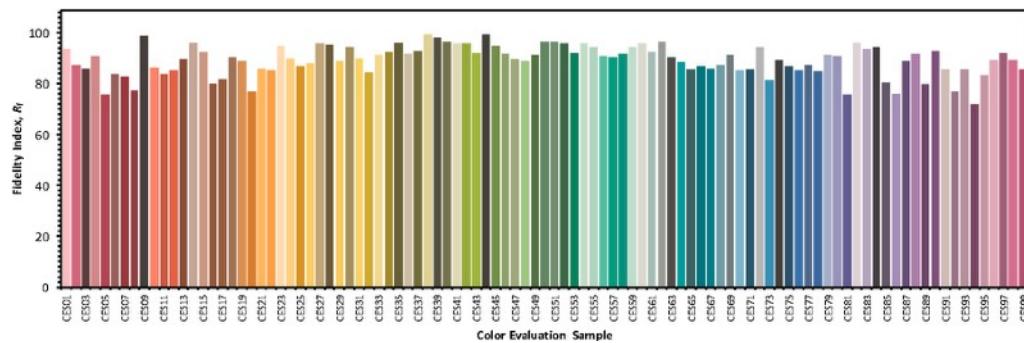


| | |
|-------------|--------|
| u' | 0,2744 |
| v' | 0,5336 |
| x | 0,4835 |
| y | 0,4179 |
| Δuv | 0,0012 |
| $R9$ | 46 |

CQS

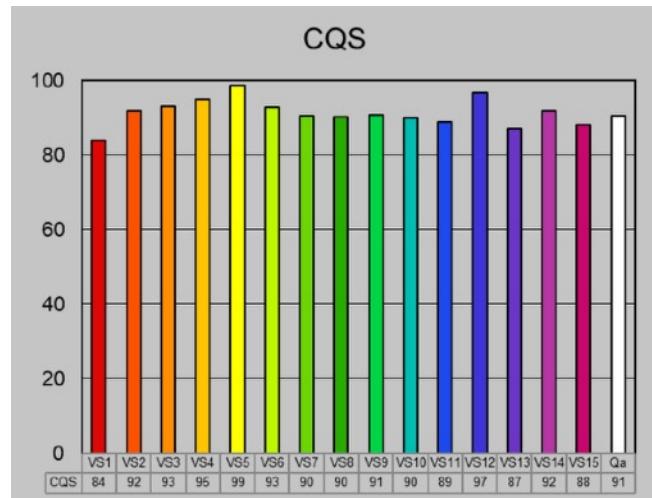


| | |
|------------|----|
| $Rg@2700K$ | 99 |
| $Rf@2700K$ | 89 |

COLOR VECTOR GRAPHIC

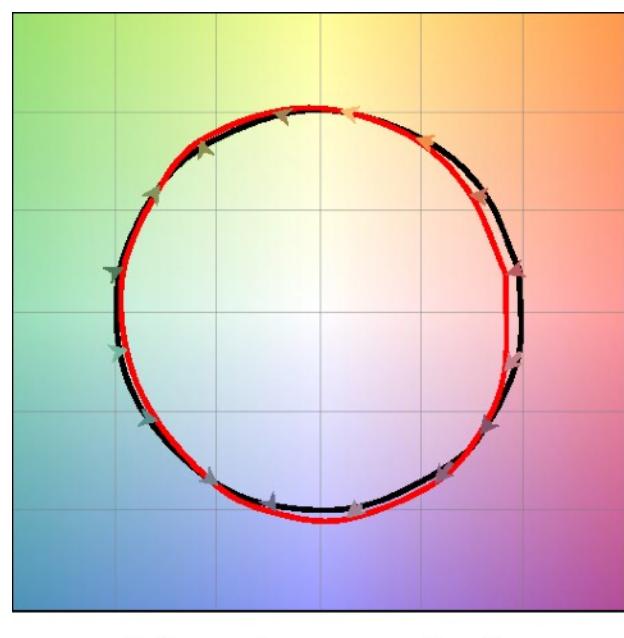

FIDELITY INDEX

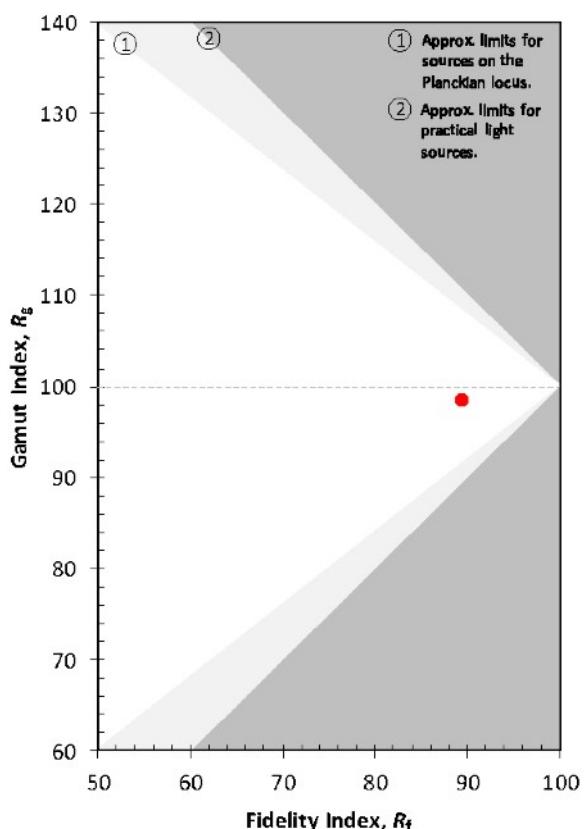

PRODUCT CODES FOR ORDER INFORMATION

OFF-SET
OFF-SET NT sign

| | | model | beam angle | housing finish | visor/base finish | LED temperature | power | current |
|----------|---|---|-----------------|--|-------------------|------------------------------------|-------------------------------------|----------------------------------|
| | | 401 NT 1x1 rounded with engraving option 441 NT 1x1 square with engraving option | 7 diffuse light | WH white RAL9010 powder coated BL black anodised GO gold anodised GM gun metal anodised SI matte silver anodised BR bronze anodised | - | 4 2400°K 7 2700°K | E dimmable (driver excluded) | C7 constant current 700mA |
| 9 | . | N | . | . | . | . | . | . |

| < | | model | beam angle | housing finish | visor/base finish | LED temperature | power | current |
|----------|---|--|-----------------|--|-------------------|------------------------------------|-------------------------------------|--|
| | | 402 NT 2x1 long rounded with engraving option 403 NT 3x1 long rounded with engraving option 442 NT 2x1 long rectangular with engraving option 443 NT 3x1 long rectangular with engraving option | 7 diffuse light | WH white RAL9010 powder coated BL black anodised GO gold anodised GM gun metal anodised SI matte silver anodised BR bronze anodised | - | 4 2400°K 7 2700°K | E dimmable (driver excluded) | C7 constant current 700mA V2 constant voltage 24v |
| 9 | . | N | . | . | . | . | . | . |

*Black54 reserves the right of discontinuing or replacing products inside this database

ACCESSORIES


OFF-SET OFF-SET NT sign




7.P.101 1x1 front mounting tool rounded




7.P.141 1x1 front mounting tool square




7.P.102 2x1 front mounting tool rounded



7.P.142 2x1 front mounting tool square



7.P.103 3x1 front mounting tool rounded



7.P.143 3x1 front mounting tool square




7.P.201 1x1 back mounting tool rounded



7.P.241 1x1 back mounting tool square



7.P.202 2x1 back mounting tool rounded



7.P.242 2x1 back mounting tool square



7.P.203 3x1 back mounting tool rounded



7.P.243 3x1 back mounting tool square



7.P.7000 DCDC converter 700mA/24V dc